



# 100 YEARS OF CUTTING TOOL PROGRESS

**Continuous demands for maximum production speed, longer tool life and process security drive cutting tool development, and have for the past century. As workpiece materials and machining operations become more complex, so have the tools and coatings created to boost metalcutting productivity for today's manufacturers.**

Advancements in cutting tools started as early as the mid-1920s when tool developers applied cemented tungsten carbide to cutting tools. This entailed sintered metal-matrix composites of hard carbide granules bound together with a metallic binder material via the powder metallurgy process. Doing so provided a hard, tough alternative to steel cutting tools.

Additions of titanium carbide to the tool material mix in the 1930s further boosted tool life in the machining of steel workpieces. Subsequent developments included the manipulation of the binder components and carbide grain sizes to adapt tool operating characteristics for different applications and materials.

## The coatings revolution

The advent of hard cutting tool coatings including TiN, TiC and TiCN in the late 1960s brought about dramatic improvement in tool performance. The greater lubricity, along with resistance to thermal deformation and abrasive and chemical wear of these coatings enabled reliable use of higher cutting speeds while increasing tool life by 10 times or more. Research and development in coating processes and materials such as Al<sub>2</sub>O<sub>3</sub> further multiplied the productivity benefits of coatings.

Toolmakers first applied coatings via the chemical vapor deposition (CVD) process, in which tools are heated to approximately 1000°C and exposed to streams of gasses that deposit on the tool

surfaces. For example, a combination of  $TiCl_4$ , hydrogen and nitrogen gases produces the basic titanium nitride (TiN) coating. Typical CVD coating thicknesses are  $5\ \mu m - 20\ \mu m$ , depending on the tool's intended application.


CVD generally provides a homogenous coating with good adhesion to the carbide tool substrate. However, CVD's high process temperatures can cause substrate components such as W, C, and Co to diffuse into the coatings and create a brittle layer called eta phase at the substrate-coating interface.

Depending on its thickness, eta phase will negatively affect coating adhesion. Accordingly, control of the interaction between the coating and the cutting tool substrate is a critical consideration in coating process development. In addition, the difference between the thermal expansion coefficients of the tool substrate and the coating at high temperatures can cause residual tensile stresses in the coatings that can lead to cracking.

## The advent of multi-layer coatings

In the mid-70s, toolmakers began to apply coatings in multiple layers using a variety of materials including TiN, TiC, TiCN and  $Al_2O_3$ . These multi-layer coating structures were created to take advantage of the differing performance characteristics of each coating material applied.

For instance, TiN is effective at lower speeds, TiC and TiCN provide abrasive wear resistance at medium cutting speeds, while  $Al_2O_3$ , with high microhardness at elevated temperatures and chemical inertness, is suited for high speed machining of ferrous materials. When  $Al_2O_3$  coatings were deposited directly on carbide tools, poor adhesion was a problem, but this was overcome with the introduction of an intermediate layer of TiC.

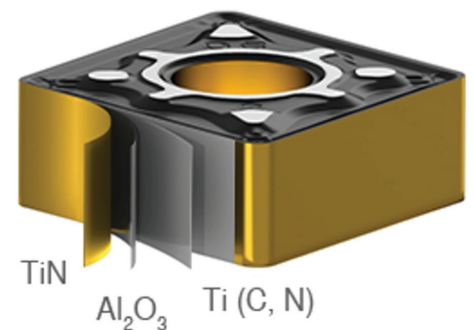

Besides adding different machining capabilities, interrupting the coating process for the formation of a new layer results in slower grain growth and smaller grain size that improves coating toughness and adhesion. A multi-layer coating may go through 30 to 40 individual steps to create four different layers on a tool.

A significant step forward in coating technology occurred in the 90s when toolmakers found ways to CVD coat inserts via a medium-temperature ( $\sim 800^\circ C$ ) process. The lower temperatures enable use of different varieties of coating materials and also reduce diffusion of carbide from the substrate into the coating. Narrowing the differences in thermal expansion between the coating and substrate also minimizes residual tensile stresses.

A significant step forward in coating technology occurred in the 90s when toolmakers found ways to CVD coat inserts via a medium-temperature ( $\sim 800^\circ C$ ) process.

Introduced in the late 1970s, physical vapor deposition (PVD) coating technology occurs at relatively low ( $\sim 500^\circ C$ ) temperatures and involves vaporizing coating material via arc discharge or cathodic sputtering and depositing it on the tool in a line-of-sight stream. Typical PVD coating thickness is  $2\ \mu m - 5\ \mu m$ , making it well suited for coating sharp cutting tool edges.

In addition to the benefits of lower-temperature application, the PVD process can apply a wide variety of coating materials and produces compressive residual stress in the coating. However, because PVD coating is a line-of-sight process, applying the coating evenly can be challenging.

This is why implementing PVD requires careful fixturing of the tools relative to the stream of coating

material to ensure full coverage. Fixturing may involve methods such as placing the tools on a rotating carousel, or magnetic holding is another way to position tools for unobstructed coating.

To adjust tool performance, tooling manufacturers manipulate coating thickness. When varying coating thickness, it is necessary to rebalance the relationships between the substrate and different coating materials. Coating grain structure also influences tool effectiveness; in the early 2000s tool manufacturers began to work with the orientation of the grain structure, finding that coatings with a hexagonal structure have improved properties in some applications.

In addition to the manipulation of coating thicknesses, post-coating surface treatments can also influence coating effectiveness.

For instance, the surface roughness of CVD coatings is usually higher than that of PVD coatings, thus requiring post-treatment processes such as blasting or brushing to not only reduce surface roughness but also to relieve residual tensile stress in the coating. The method and intensity of post-coating treatments depend on the geometry and shape of the tool. If the cutting edges are delicate, the treatment must be carefully controlled so as to not produce edge damage.



Regardless of single or multiple layers, a key issue in coating technology development is process security. Reliable performance is crucial in maintaining production flow and controlling manufacturing costs. Coating methods are chosen in consideration of the failure modes expected in specific applications. For example, thick Al<sub>2</sub>O<sub>3</sub> coatings can moderate crater wear precipitated by heat-generated diffusion between the coating and workpiece in high-speed machining. Harder, highly wear-resistant coatings, on the other hand, can reduce excessive abrasive wear of the cutting tool edge.

Workpiece materials and the operations being performed dictate tool compositions. Turning grades, for example, are designed to cover a wide range of materials, from low carbon steel to harder materials, and operations from finishing to roughing, heavy interrupted cuts to smooth cuts. This requires choosing among carbide substrates ranging from very hard to very tough, complemented by coatings fine-tuned to resist the heat, pressures and interruptions present in the operation at hand.

Toolmakers have to be wary of making substrate/coating systems too complicated. End users would prefer that a single product cover an extensive range of applications. But achieving that from a technical point of view requires compromises in tool performance throughout the application range.

Regardless of single or multiple layers, a key issue in coating technology development is process security. Reliable performance is crucial in maintaining production flow and controlling manufacturing costs.

CERATIZIT, for example, works to narrow the choices to two, three or four combinations that cover a wide variety of metalcutting scenarios while maximizing tool performance. It is important to make tool selection user-friendly and less complex. The goal is not to make fancy coatings, but to satisfy end users and fill their needs in a cost-efficient way.

Modern tool development also takes into account the individual characteristics of the tool substrate, the coating, the workpiece material and the interactions among them. With that said, larger cutting tool manufacturers tend to have an advantage because they can create and



control the entire toolmaking process from powder manufacturing to formulation of tool substrates and coating materials.

These more capable toolmakers consequently produce tools engineered for specific end uses, whereas smaller manufacturers may lack development flexibility because they have to utilize tool blanks from outside manufacturers and have coating performed by a contract tool coating company. Developmental testing of the tools may also be limited at smaller toolmaking businesses.

## Dragonskin: the latest in multi-layer coating technology




In its continuing efforts to produce tools designed to boost productivity in specific materials and applications, CERATIZIT recently developed its Dragonskin multi-layer coating technology. The gold-colored TiN outer layer of the Dragonskin multilayer CVD Ti(C,N)/Al<sub>2</sub>O<sub>3</sub>/TiN coating acts as an indicator to enable users to clearly identify insert wear and index the tool in a timely manner.

Recalling the iconic invulnerability of a dragon's skin, Dragonskin coatings maximize tool life by providing multi-faceted protection against the harsh elements of the metal cutting environment. The name symbolizes CERATIZIT's century of accumulated tool development and application know-how.


CERATIZIT bases the coatings on nanometer-scale science – the study and development of molecular- and atom-sized materials. A human hair measures 100,000 nanometers wide; nano-scale coatings less than 100 nanometers thick, applied alternately in multiple layers, have shown to support extended tool life. As in the early days of multi-layer tool coatings, research engineers

combine characteristics of multiple materials in nanolayers to optimize tool performance in specific applications and operations.

In addition, a mechanical post-coating treatment produces beneficial residual compressive stress in the coating that results in

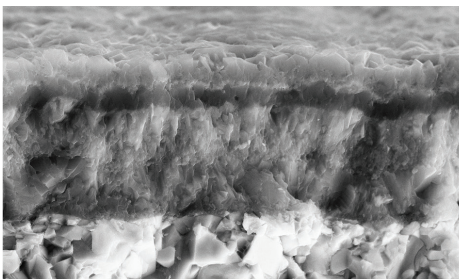

Previous

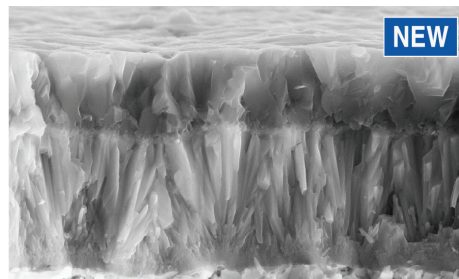


New Dragonskin Coating

increased process security, which is especially important in large-volume production situations. The extremely smooth surfaces that result have a positive effect on the contact friction between chip and rake face – chips are removed more quickly. The result is reduced wear with longer tool life.

In its latest application of the Dragonskin coating, CERATIZIT developed a group of metalcutting inserts specifically engineered to machine ISO-P metals. The ISO-P classification includes unalloyed to high-alloyed steels as well as castings and ferritic and martensitic stainless steels.

With revised substrates, geometries and coatings, the new tools provide up to 45 percent longer tool life than the company's legacy grades, depending on the cutting speeds involved. Dragonskin products are formulated with a combination of state-of-the-art high-performance substrates and the latest coating structures to achieve maximum tool life, cutting speeds and process reliability.

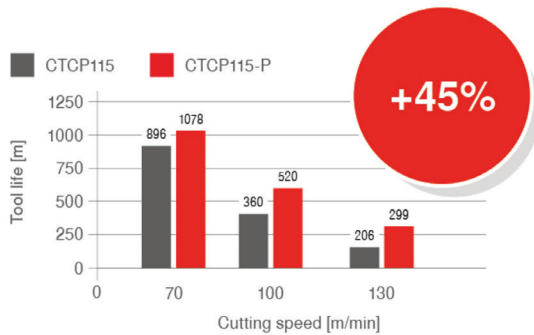

Performance increase of the new grades:

Cutting speed vc	Increase in %
70 m/min	20
100 m/min	44
130 m/min	45

The updated insert offering includes three grades developed for specific production scenarios. The CTCP115-P (ISO P15) grade has enhanced resistance to high temperatures and is ideal for use at higher cutting speeds in smooth, continuous cuts in stable cutting conditions. The CTCP125-P (ISO P25) universal steel-cutting grade balances toughness and wear resistance to provide consistent reliability in turning operations ranging from finishing to rough machining. And CTC135-P (ISO P35) is a tough carbide grade suited for lower cutting speeds, interrupted cuts and unstable machining conditions.

## A future built on the past

CERATIZIT's history of pioneering cutting tool development extends back to 1931, when Nicholas Lanners founded CERATIZIT's predecessor Cerametal in Luxembourg. Belgian scientist Dr. William Kroll, who first developed processes for large-scale production of titanium, contracted Cerametal to perform the world's first titanium metalworking operations. When Cerametal reorganized after World War II, Dr. Kroll became a shareholder.

Today, CERATIZIT (formed in 2002 with the merger of Cerametal and Austrian carbide materials pioneer Plansee Tizit) creates competitive advantages through the setting of new technological standards and development of innovative materials and coatings as well as unique carbide products. The company invests continuously in fundamental research, process technology, product development and application technology. At six different locations – Sacramento, California; Reutte, Austria; Mamer, Luxembourg; Balzheim, Germany; Uluberia, India; and Bangalore, India – CERATIZIT applies the company's advanced coatings to its products.

As a technological frontrunner in the carbide industry, CERATIZIT holds over 1,000 patents worldwide and employs more than 200 employees in research and development. CERATIZIT stays at the top of new materials technology via cooperative partnerships with universities and leading research institutes across Europe.



CERATIZIT USA  
 customerservice.usa@ceratizit.com  
 1-800-783-2280  
 techsupport.usa@ceratizit.com